


## Luxmeter LX 50

### KEY POINTS

- Easy to use
- HOLD function
- Built-in probe
- Auto shut-off : 20 minutes

### FEATURES OF THE HOUSING

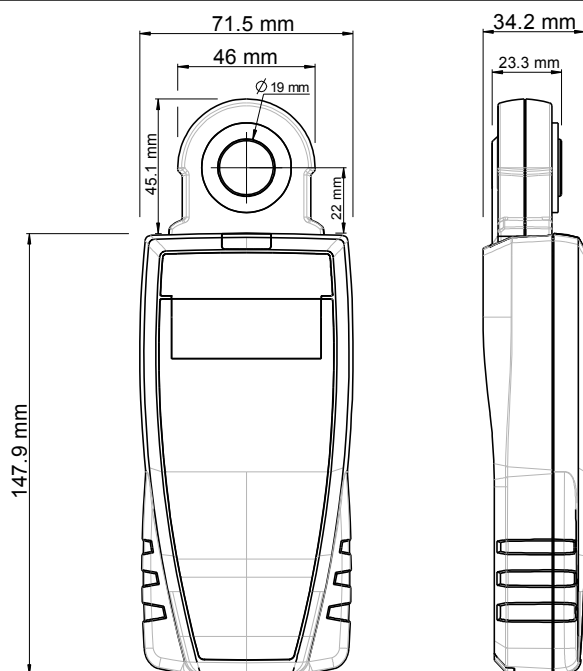

**Material :** ABS

**Protection :** IP54

**Display :** 1 line  
LCD 1 x 5 digits  
Size : 50 x 20 mm

**Height of digits :**  
Values : 9.2 mm  
Units : 4.7 mm

**Weight :** 200 g (with batteries)



### TECHNICAL FEATURES

Parameter	Light
<b>Measuring units</b>	lux, klux, fc
<b>Measuring range</b>	From 0 to 10000 lux / From 0 to 10 klux From 0 to 929 fc
<b>Accuracy*</b>	±3% of reading ±3 lux
<b>Resolution</b>	From 0 to 999.9 lux : 0.1 lux / from 1000 to 10000 lux : 1 lux From 0 to 0.9999 klux : 0.0001 klux / from 1 to 10 klux : 0.001 klux From 0 to 99.99 fc : 0.01 fc / from 100 to 929 fc : 0.1 fc
<b>Measuring element</b>	Silicon Photodiode
<b>Spectral range</b>	In accordance with the standard photopic curve V(λ) NF C 42-710 class C
<b>Estimation of uncertainty on V(λ) (f1)</b>	<10%
<b>Directional sensitivity (f2)</b>	<6%
<b>Linearity</b>	<3%
<b>Operating temperature</b>	From 0 to +50 °C
<b>Storage temperature</b>	From -10 to +70 °C
<b>Power supply</b>	4 batteries AAA LR03 1.5 V
<b>Battery life</b>	20 hours
<b>Conformity</b>	Directives CEM 2004/108/CE and NF EN 61010-1

\* All the accuracies indicated in this technical datasheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation

---

## SUPPLIED WITH

---

Instruments are supplied with an adjustment certificate and a soft case.



---

## ACCESSORIES

---

- Adjustment certificate
- Soft case
- Magnetic protective housing



---

## MAINTENANCE

---

We carry out calibration, adjustment and maintenance of your instruments to guarantee a constant level of quality of your measurements. As part of Quality Assurance Standards, we recommend you to carry out a yearly checking.

---

## GUARANTEE

---

Instruments have 1-year guarantee for any manufacturing defect (return to our After-Sales Service required for appraisal).

---

## USE OF THE INSTRUMENT

---

### Take a measurement

- Switch on the instrument by pressing on « **On/Off/Hold** ».  
*The instrument displays its name « LX50 », then the measured value.*
- Press briefly on « **Select** » to move from the light measurement to the temperature measurement.

### Hold the measurement

*During measurement:*

- Press briefly on « **On/Off/Hold** » to hold measurement.  
*« Hold » appears on the screen and temperature and light measurements are fixed.*
- Press briefly on « **Select** » to move from one parameter to the other.
- Press again briefly on « **On/Off/Hold** » to exit the Hold function.

### Change the light unit

- Press briefly on « **Select** » up to display the light.
- Pressing longer on « **Select** » to change the light unit.
- Press briefly on « **Select** » to select the unit: lux, klx, fc.
- Pressing longer on « **Select** » to return to the normal measuring mode.

### How to change batteries

- Remove the front part at the back of the instrument.
- Replace used batteries by new batteries AAA LR03 1.5 V.
- Replace the front.



Auto shut-off : the instrument switches off if not used during 20 minutes.



Once returned to KIMO, required waste collection will be assured in the respect of the environment in accordance to 2002/96/CE guidelines relating to WEEE.

[www.kimo.fr](http://www.kimo.fr)

Distributed by :



**EXPORT DEPARTMENT**  
Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29  
e-mail : [export@kimo.fr](mailto:export@kimo.fr)